

Victoria Transport Policy Institute

1250 Rudlin Street, Victoria, BC, V8V 3R7, CANADA

www.vtpi.org info@vtpi.org

Phone & Fax 250-360-1560

"Efficiency - Equity - Clarity"

**Generated Traffic and Induced Travel
*Implications for Transport Planning***

by

Todd Litman

Victoria Transport Policy Institute

18 October 2003

Abstract

Traffic congestion tends to maintain an equilibrium. Congestion reaches a point at which it constrains further growth in peak-period trips. If road capacity increases, the number of peak-period trips also increases until congestion again limits further traffic growth. The additional travel is called "generated traffic." Generated traffic consists of diverted traffic (trips shifted in time, route and destination), and induced vehicle travel (shifts from other modes, longer trips and new vehicle trips). Research indicates that generated traffic often fills a significant portion of capacity added to congested urban road.

Generated traffic has three implications for transport planning. First, it reduces predicted congestion reduction benefits of road capacity expansion, particularly over the long term. Second, it increases many external costs, particularly over the longer term due to changes in transportation choices and land use patterns. Third, it provides relatively small user benefits because it consists of vehicle trips that consumers most willing forego.

It is important that transport planning incorporate generated traffic. Failing to do so tends to overstate the benefits of roadway capacity expansion and undervalues alternatives. This paper defines various types of generated traffic, discusses the impacts of generated traffic, recommends ways to incorporate generated traffic into transport planning, and describes ways to use existing roadway capacity more efficiently.

A version of this paper was published in the *ITE Journal*, Vol. 71, No. 4, Institute of Transportation Engineers (www.ite.org), April 2001, pp. 38-47.

© 1998-2003

Todd Alexander Litman

All Rights Reserved

Introduction

Planners often compare traffic to a fluid, assuming that a certain volume must flow through the road system. But urban traffic may be more comparable to a gas that expands to fill available space (Jacobsen, 1997). Road improvements that reduce travel costs attract trips from other routes, times and modes, and encourage longer and more frequent travel. This is called *generated traffic*, referring to vehicle traffic on a particular road link. This consists in part of *induced travel*, which refers increases in total vehicle travel (VMT), excluding traffic diverted from other routes or times (Hills, 1996).

Generated traffic reflects the economic “law of demand,” which states that consumption of a good increases as its price declines. Roadway improvements that alleviate congestion reduce the generalized cost of driving (i.e., the price), which encourages more vehicle use. Put another way, most urban roads have latent travel demand: additional peak-period vehicle trips that will occur if congestion is relieved. In the short-run generated traffic represents a shift along the demand curve: reduced congestion makes driving cheaper per mile or kilometer in terms of travel time and vehicle operating costs. Over the long run induced travel represents an outward shift in the demand curve as land use patterns and transport systems become more automobile dependent, and so people must drive more to maintain a given level of access to goods, services and activities (Lee, 1999).

This is not to suggest that increasing road capacity provides no benefits, but generated traffic affects the nature of these benefits. It means that road capacity expansion benefits consist more of increased peak-period mobility and less of reduced traffic congestion. Accurate transport planning and project appraisal must consider these three impacts:

1. Generated traffic reduces the predicted congestion reduction benefits of increased road capacity.
2. Induced travel imposes some costs, including downstream congestion, accidents, parking costs, pollution, and other environmental impacts.
3. The additional travel that is generated provides relatively modest user benefits, since it consists of marginal value trips (travel that consumers are most willing to forego).

Ignoring these factors distorts planning decisions. Experts conclude, “...*the economic value of a scheme can be overestimated by the omission of even a small amount of induced traffic. We consider this matter of profound importance to the value-for-money assessment of the road programme*” (SACTRA, 1994). And “...*quite small absolute changes in traffic volumes have a significant impact on the benefit measures. Of course, the proportional effect on scheme Net Present Value will be greater still*” (Mackie, 1996)

This paper describes how generated traffic can be incorporated into transport planning. It defines different types of generated traffic, discusses their impacts, and describes ways to incorporate generated traffic into transport modeling and planning, and provides information on strategies for using existing roadway capacity more efficiently.

Defining Generated Traffic

Generated traffic is the additional vehicle travel that results from a road improvement. Congested roads cause people to defer trips that are not urgent, choose alternative destinations and modes, and forego avoidable trips. Projects that reduce congestion increase peak-period driving. Below are examples of decisions that generate traffic:

- Consumers choose closer destinations when roads are congested and further destinations when traffic flows more freely. *“I want to try the new downtown restaurant but traffic is a mess now. Let’s just pick up something at the local deli.”* This also affects long-term decisions. *“We’re looking for a house within 40-minute commute time of downtown. Now that the new highway is going in we’d considering anything as far as Midvalley.”*
- Travelers shift modes to avoid driving in congestion. *“The post office is only five blocks away and with the congestion this time of day, I may as well walk there.”*
- Longer trips may seem cost effective when congestion is light but not when congestion is heavy. *“We’d save \$5 on that purchase at the Wal-Mart across town, but it’s not worth fighting traffic so let’s buy it nearby.”*

Generated Traffic Example

Suzanne must deliver a package 10 miles across town. Her time is worth \$15 per hour, her vehicle costs 10¢ per mile to operate under free flowing conditions and 15¢ under congested conditions. The trip takes 30 minutes when roads are uncongested and 60 minutes when congested. Her alternative is to ship the package, which takes 10 minutes, and costs \$5.00, a total cost of \$7.50. She delivers the package herself if the road is uncongested, saving \$0.50, but mails it if roads are congested, saving \$5.50. A congestion reduction project would generate this trip.

User Costs

	<i>Car Trip, <u>Uncongested</u></i>	<i>Car Trip, <u>Congested</u></i>	<i>Mail <u>Package</u></i>
Time	\$5.00	\$10.00	\$2.50
Postage	0.00	0.00	5.00
Vehicle cost	<u>2.00</u>	<u>3.00</u>	<u>0.00</u>
<i>Total cost</i>	<i>\$7.00</i>	<i>\$13.00</i>	<i>\$7.50</i>

The generated trip imposes external costs, including congestion, pollution, parking, and accident risk. Assume the average external cost of driving is 50¢ per mile under congested condition and 25¢ per automobile mile under uncongested conditions, a delivery truck carries 250 packages, imposes costs double those of an automobile. The total cost of driving is actually higher than the total cost of mailing the package under either level of congestion.


Total Costs

	<i>Car Trip, <u>Uncongested</u></i>	<i>Car Trip, <u>Congested</u></i>	<i>Mail <u>Package</u></i>
Internal Costs	\$7.00	\$13.00	\$7.50
External Costs	<u>5.00</u>	<u>10.00</u>	<u>0.08</u>
<i>Total Costs</i>	<i>\$12.00</i>	<i>\$23.00</i>	<i>\$7.58</i>

Travel time budget research indicates that increased traffic speeds often results in more mobility rather than saving time. People tend to average about 75 minutes of daily travel time regardless of transport conditions (Levinson and Kumar, 1995). National data indicate that as freeway travel increases, average commute trip distances and speeds increase, but trip time stays about constant (Levinson and Kumar, 1997). As a result, traffic congestion tends to maintain a self-limiting equilibrium: once congestion becomes a problem it discourages further growth in peak-period travel. Road improvements that reduce congestion in the short term attract additional peak-period trips until congestion once again reaches a level that limits further growth. It may therefore be incorrect to claim that congestion reductions save travel time.

Figure 1 illustrates this pattern. Traffic volumes grow until congestion develops, then the growth rate declines and achieves equilibrium, indicated by the curve becoming horizontal. A demand projection made during the growth period will indicate that more capacity is needed, ignoring the tendency of traffic volumes to eventually level off. If additional lanes are added there will be another period of traffic growth as predicted.

Figure 1 Effect of Road Capacity on Traffic Volumes

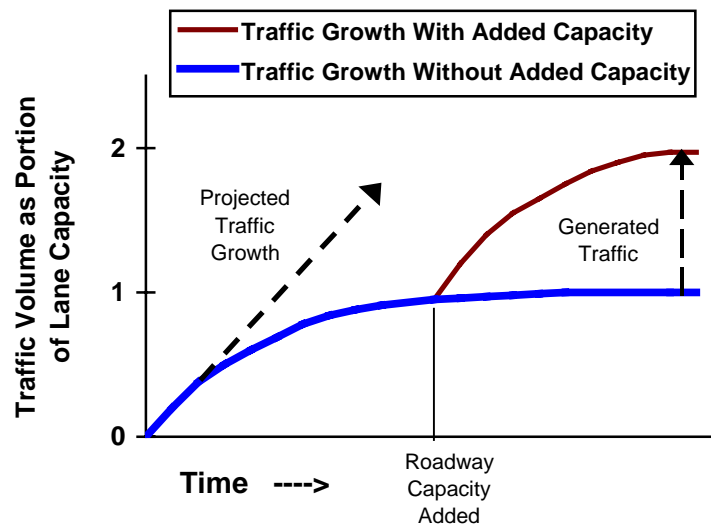

Traffic grows when roads are uncongested, but the growth rate declines as congestion develops, reaching a self-limiting equilibrium (indicated by the curve becoming horizontal). If capacity is added, traffic growth continues until it reaches a new equilibrium. The additional vehicle travel that results from increased roadway capacity is called “generated traffic” or “induced travel.”

Generated traffic can be considered from two perspectives. Project planners are primarily concerned with the traffic generated *on a road segment that is expanded*, since this affects the project’s congestion relief. Others may be concerned with changes in *total vehicle travel* (induced travel) which affects overall benefits and costs. Table 1 describes various types of generated traffic. In the short term, most generated traffic consists of trips diverted from other routes, times and modes, called *Triple Convergence* (Downs, 1992). Over the long term an increasing portion consists of induced travel.

Table 1 Types of Generated Traffic

Type of Generated Traffic	Category	Time Frame	Travel Impacts	Cost Impacts
<i>Shorter Route</i> Improved road allows drivers to use more direct route.	Diverted trip	Short term	Small reduction	Reduction
<i>Longer Route</i> Improved road attracts traffic from more direct routes.	Diverted trip	Short term	Small increase	Slight increase
<i>Time Change</i> Reduced peak period congestion reduces the need to defer trips to off-peak periods.	Diverted trip.	Short term	None	Slight increase
<i>Mode Shift; Existing Travel Choices</i> Improved traffic flow makes driving relatively more attractive than other modes.	Induced vehicle trip	Short term	Increased driving	Moderate to large increase
<i>Mode Shift; Changes in Travel Choice</i> Less demand leads to reduced rail and bus service, less suitable conditions for walking and cycling, and more automobile ownership.	Induced vehicle trip	Long term	Increased driving, reduced alternatives	Large increase, reduced equity
<i>Destination Change; Existing Land Use</i> Reduced travel costs allow drivers to choose farther destinations. No change in land use patterns.	Longer trip	Short term	Increase	Moderate to large increase
<i>Destination Change; Land Use Changes</i> Improved access allows land use changes, especially urban fringe development.	Longer trip	Long term	Increased driving and auto dependency	Moderate to large increase, equity costs
<i>New Trip; No Land Use Changes</i> Improved travel time allows driving to substitute for non-travel activities.	Induced trip	Short term	Increase	Large increase
<i>Automobile Dependency</i> Synergetic effects of increased automobile oriented land use and transportation system.	Induced trip	Long term	Increased driving, fewer alternatives	Large increase, reduced equity

Some types of generated traffic represent diverted trips (trips shifted from other times or routes) while others increase total vehicle travel, reduce travel choices, and affect land use patterns.

Of course, the actual occurrence of “short term” and “long term” impacts can be quite variable. Some “short term” effects, such as mode shifts that result from changes in consumer habits, may continue to accumulate over several years, and some “long term” effects, such as changes in development patterns, can begin almost immediately after a project is announced if market conditions are suitable.

Generated traffic can also work in reverse. When urban roadway capacity is reduced a significant portion of previous vehicle traffic may disappear altogether (Cairns, Hass-Klau and Goodwin, 1998).

Induced vehicle travel can occur on roads which have no added capacity (Hansen, et al, 1993), apparently because road capacity expansion “leverages” automobile dependent land use patterns. For example, a new highway may encourage households and businesses to locate in suburban and exurban areas. Although these indirect impacts are difficult to quantify they are potentially large and should be considered in transport planning (Louis Berger & Assoc. 1998).

Definitions

Generated Traffic: Additional vehicle trips on a particular roadway or area that occur when roadway capacity is increased, or travel conditions are improved in other ways. This may consist of shifts in travel time, route, mode, destination and frequency).

Induced travel: An increase in total vehicle mileage due to increased motor vehicle trip frequency, longer trip distances or shifts from other modes, but excludes travel shifted from other times and routes.

Latent demand: Additional trips that would be made if travel conditions improved (less congested, higher design speeds, lower vehicle costs or tolls).

Measuring Generated Traffic

Several studies using various analysis techniques have examined the amount of traffic generated by specific projects (Goodwin, 1996). Their findings are summarized below:

- Time-series travel data for various types of roadways indicates an elasticity of vehicle travel (VMT) with respect to lane miles of 0.5 in the short run, and 0.8 in the long run (Noland, 2001). This means that half of increased roadway capacity will be filled with new travel within about 5 years, and that 80% of the increased roadway capacity will be filled eventually. Urban roads, which tend to be most congested, had higher elasticity values than rural roads, as would be expected due to the greater congestion and latent demand in urban areas.
- The elasticity of highway traffic with respect to California state highway capacity was measured to be 0.6-0.7 at the county level and 0.9 at the municipal level in the medium term (Hansen and Huang, 1997). This means that 60-90% of increased road capacity is filled with new traffic within five years. Total vehicle travel increased 1% for every 2-3% increase in highway lane miles. The researcher concludes, “it appears that adding road capacity does little to decrease congestion because of the substantial induced traffic” (Hansen, 1995). Mokhtarian, et al (2002) applied a different statistical technique (matched-pairs) to the same data and found no significant induced travel effect, but this technique does not account for additional vehicle travel on other roads or control for other factors that may affect traffic volumes.
- A study by leading U.K. transportation economists concludes that the elasticity of travel volume with respect to travel time is -0.5 in the short term and -1.0 over the long term (SACTRA, 1994). This means that reducing travel time on a roadway by 20% typically increases traffic volumes by 10% in the short term and 20% over the long term.
- One study found the following elasticity values for vehicle travel with respect to travel time: urban roads, -0.27 in the short-term and -0.57 over the long term; rural roads, -0.67 in the short term and -1.33 in the long term (Goodwin, 1996). These values are used in the FHWA’s SMITE software program described below.

- A Transportation Research Board report based finds consistent evidence of generated traffic, particularly with respect to travel time savings (Cohen, 1995).
- National Highway Institute concludes that the elasticity of highway travel with respect to users' generalized cost (travel time and financial expenses) is typically -0.5 (NHI, 1995).
- Analysis of traffic conditions in 70 metropolitan areas finds that regions which invested heavily in road capacity expansion fared no better in reducing congestion than those that spent far less (STPP, 1998). The researchers estimate that road capacity investments of thousands of dollars annually per household would be needed achieve congestion reductions.
- Cross-sectional time-series analysis of traffic growth in the U.S. Mid-Atlantic region found an average elasticities of VMT with respect to lane miles to be 0.2 to 0.6 (Noland and Lem, 2002).
- Small (1992) concludes that 50-80% of increased highway capacity is soon filled with generated traffic, based on a detailed review of previous studies.
- The USDOT Highway Economic Requirements System (HERS) investment analysis model uses a travel demand elasticity factor of -0.8 for the short term, and -1.0 for the long term, meaning that if users' generalized costs (travel time and vehicle expenses) decrease by 10%, travel is predicted to increase 8% within 5 years, and an additional 2% within 20 years (Lee, Klein and Camus, 1998).
- Cervero and Hanson (2000) found the elasticity of VMT with respect to lane-miles to be 0.56, and an elasticity of lane-miles with respect to VMT of 0.33, indicating that roadway capacity expansion results in part from anticipated traffic growth.
- Cervero (2003) uses sixty years of data on roadway and population growth in areas around Chicago to evaluate the effects of highway capacity expansion on travel and land use development. He concludes that 31% of added highway capacity is absorbed through behaviour shifts that induce additional vehicle miles, and 9% is absorbed by land use development changes that induce additional vehicle miles.
- Modeling analysis indicates that adding an urban beltway can increase regional VMT by 0.8-1.1% for each 1.0% increase in lane capacity (Rodier, et al, 2001).


Portion of New Capacity Absorbed by Induced Traffic

Author	Short-term	Long-term (3+ years)
SACTRA		50 - 100%
Goodwin	28%	57%
Johnson and Ceerla		60 - 90%
Hansen and Huang		90%
Fulton, et al.	10 - 40%	50 - 80%
Marshall		76 - 85%
Noland	20 - 50%	70 - 100%

The amount of traffic generated by road capacity expansion varies depending on conditions. It is not the capacity expansion itself that affects travel, but rather the reduced congestion delays that result. Expanding capacity on an uncongested road will not itself generate traffic or induce travel, although paving a dirt road or significantly raising roadway design speeds may induce vehicle travel by increasing travel speeds and reducing per-mile vehicle costs. In general, the more congested a road, the more traffic is generated by increased capacity. Increased capacity on highly congested urban roads usually generates considerable traffic due to high levels of latent demand (Marshall, 2000). Historical studies of the elasticity of VMT growth with respect to increased roadway lane-miles during periods when much of the capacity was added in rural areas will have little relevance to evaluating the impacts of adding urban highway capacity.

Generated traffic usually accumulates over several years (Goodwin, 1998). Formal procedures exist for taking the dynamic nature of these impacts into account, which is essential for accurate modeling and economic analysis (Dargay and Goodwin, 1995). Under typical urban conditions, more than half of added capacity is filled within five years of project completion by additional vehicle trips that would not otherwise occur, with additional but slower growth in later years. Figure 2 shows the estimated range of generated traffic, based on these studies.

Figure 2 Elasticity of Traffic Volume With Respect to Road Capacity

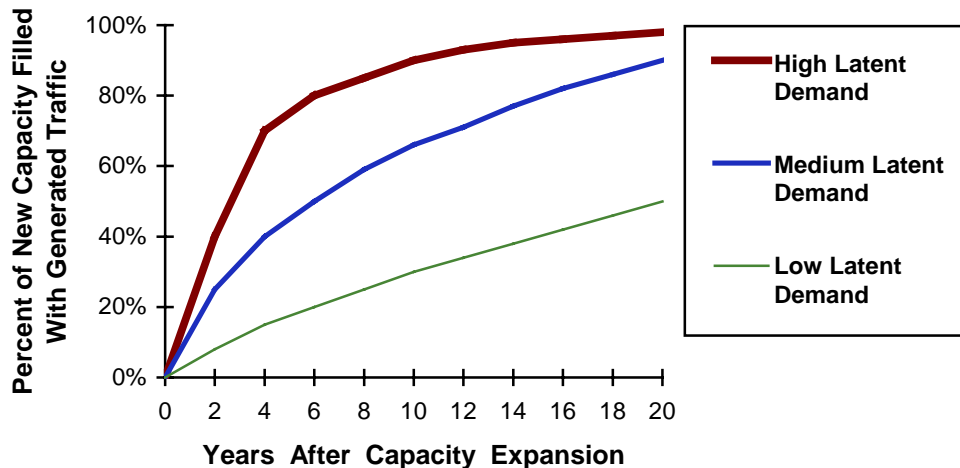

This illustrates traffic growth on a road after its capacity increases. About half of added capacity is typically filled with new traffic within a decade of construction. (Based on cited studies)

Gridlock?

Highway advocates sometimes predict that roads will reach “gridlock” unless capacity is increased. Such claims are usually exaggerated because they ignore the tendency of traffic congestion to maintain equilibrium. Gridlock is a specific condition that occurs when backups block intersections, stopping traffic flow in a street network as vehicles on each street wait for another line of vehicles to move. Gridlock can be avoided with proper intersection design that prevents such backups. Increasing regional highway capacity can *increase* rather than reduce this risk by adding more traffic to surface streets where gridlock occurs.

Modeling Generated Traffic

To predict generated traffic, transport models must incorporate “feedback,” which reflects the impacts congestion has on travel behavior, and long-term transport and land use systems. This recognizes that congestion diverts traffic to other routes, times and modes, and reduces trip length and frequency, while reduced congestion has the opposite effects. Because of non-linear speed flow relationships, and typically small net differences between large costs and large benefits, a small amount of induced traffic can have a disproportionately large effect on the cost effectiveness of a roadway project.

Most current traffic models can predict route and mode shifts, and some can predict changes in scheduling and destination, but few adjust trip frequency, and most ignore the effects transportation decisions have on land use (Beimborn, Kennedy and Schaefer, 1996). For example, they do not recognize that highway capacity expansion encourages more automobile-dependent urban fringe development. As a result, current models recognize diverted traffic but do not account for most forms of long term induced vehicle travel, and thus underestimate the amount of traffic likely to be generated when congested roads are expanded.

Transportation modelers have developed techniques for incorporating full feedback (Harvey and Deakin, 1993; SACTRA, 1994; Loudon, Parameswaran and Gardner, 1997). This recognizes that expanding the capacity of congested roads increases the number and length of trips in a corridor (DeCorla-Souza and Cohen, 1999). Federal clean air rules require that these techniques be used in metropolitan transportation models in order to evaluate the effects transportation system changes have on vehicle emissions, but many metropolitan planning organizations have yet to comply, and few models used in medium and small cities have full feedback. Even more accurate are integrated models that incorporate interrelationships between transportation and land use patterns (Rodier, et al, 2001).

Full feedback is necessary to accurately predict future traffic congestion and traffic speeds, and the incremental costs and benefits of alternative projects and policy options. Models without full feedback tend to overestimate future congestion problems and overestimate the benefits of roadway capacity expansion. In one example, modeling a congested road network without feedback underestimated traffic speeds by more than 20% and overestimated total vehicle travel by more than 10% compared with modeling with feedback (Comsis, 1996). Models that fail to consider generated traffic were found to overvalue roadway capacity expansion benefits by 50% or more (Williams and Yamashita, 1992).

Another study found that the ranking of preferred projects changed significantly when feedback is incorporated into project assessment analysis (Johnston and Ceerla, 1996). Ignoring generated traffic tends to skew planning and investment decisions toward highway projects and away from No Build and transportation demand management alternatives such as road pricing, transit improvements and commute trip reduction programs (Boarnet, 1995).

The FHWA “Spreadsheet Model for Induced Travel Estimation” (SMITE) is specifically developed to predict the amount of vehicle traffic induced by a highway improvement, and its effects on consumer welfare and vehicle emissions (DeCorla-Souza, 2000). It is a relatively easy way to incorporate generated traffic impacts into highway project assessments. Another approach involves comprehensive land use/transportation models (TRANUS and MEPLAN are examples) that track transport benefits through their impacts on land values (Abraham, 1998).

Short Cut Methods of Incorporating Induced Demand

Based on comments in the *Transportation Model Improvement Program* listserv (TMIP-L@listserv.tamu.edu) by Phil Goodwin, 2001.

The easiest way to incorporate induced demand into conventional traffic models is to apply an overall demand elasticity to forecasted changes in travel speed, calculated either:

A) Elasticities applied to generalized costs (travel time and financial costs) using a price elasticity (about -0.3 for equilibrium, less for short term), with monetized travel time costs. The time elasticity is generally about -0.5 to -0.8 or so, though this is highly dependent on context. Where to apply it depends on the model used. With a fixed trip matrix altered only by reassignment, apply elasticities to each separate cell, or the row and column totals, or the overall control total - depending on how short the short cut has to be. Or add a separate test at the end.

or

B) Direct application of a 'capacity elasticity', i.e. percent change in vehicle miles resulting from a 1% change in highway capacity, for which lane miles is sometimes used as a proxy, the elasticity in that case usually coming out at about -0.1. This will tend to underestimate the effect if the capacity increase is concentrating on bottlenecks.

Care is needed if the basic model has cost-sensitive distribution and mode split, as this will already make allowance for some induced traffic. Induced traffic consists of several types of travel changes that make vehicle miles 'with' a scheme different from 'without', including re-assignment to longer routes and some increased trip generation. Allowance for time-shifting, which is not induced traffic at all, is equally important because it has similar effects on calculation of benefits of reducing congestion, and is often a large response. Ideally you iterate on speed and allow for the effect from retiming of journeys, and separate the various behavioural responses which make up induced traffic. These short cuts are subject to bias, but less than the bias introduced by assuming zero induced traffic.

Costs of Induced Travel

Driving imposes a variety of costs, including many that are external, that is, not borne directly by users (Murphy and Delucchi, 1998). Table 2 illustrates one estimate of the magnitude of these costs. Other studies show similar costs, with average values of 10-30¢ per vehicle-kilometer, and more under urban-peak conditions (Litman, 2002).

Table 2 Motor Vehicle Indirect and External Costs, US 1991 Dollars,
(Delucchi, 1996)

Cost Item	Examples	Vehicle-Year	Vehicle-Mile
Bundled private sector costs	Parking funded by businesses	\$337-1,181	2.7-9.4 cents
Public infrastructure and services	Public roads, parking funded by local governments	\$662-1,099	5.3-8.8 cents
Monetary externalities	External crash damages to vehicles, medical expenses, congestion.	\$423-780	3.4-6.2 cents
Nonmonetary externalities	Environmental damages, crash pain.	\$1,305-3,145	10.4-25.2 cents
<i>Totals</i>		<i>\$2,727-6,205</i>	<i>22-50 cents</i>

This table summarizes an estimate of motor vehicle indirect and external costs.

Any incremental external costs of generated traffic should be included in project evaluations, “incremental” meaning the difference between the external costs of the generated travel and the external costs of alternative activities (NHI, 1995). For diverted traffic this is the difference in external costs between the two trips. For induced travel this is the difference in external costs between the trip and any non-travel activity it replaces, which tends to be large since driving has greater external costs than most other common activities. Most generated traffic occurs under urban-peak travel conditions, when motor vehicle external costs are greatest, so incremental external costs tend to be high.

Incremental external costs depend on road system conditions and the type of generated traffic. Generated traffic often increases downstream congestion (for example, increasing capacity on a highway can add congestion on surface streets, particularly near on- and off-ramps). In some conditions adding capacity actually increases congestion by concentrating traffic on a few links in the network and by reducing travel alternatives, such as public transit (Arnott and Small, 1994). Air emission and accident rates per vehicle-mile may decline if traffic flows more freely, but these benefits decline over time and are usually offset as generated traffic leads to renewed congestion and increased vehicle travel (TRB, 1995; Shefer and Rietvald, 1997).

Table 3 compares how different types of generated traffic affect costs. All types reduce user travel time and vehicle costs. Diverted trips have minimal incremental costs. Longer trips have moderate incremental costs. Shifts from public transit to driving may also have moderate incremental costs, since transit service has significant externalities but also experiences economies of scale and positive land use impacts that are lost if demand

declines (“Social Benefits of Public Transit,” VTPI, 2001). Induced trips have the largest incremental costs, since they increase virtually all external costs. Longer and induced vehicle trips can lead to more automobile dependent transportation and land use over the long term. These costs are difficult to quantify but are probably significant (Newman and Kenworthy, 1998; Burchell, et al, 1998).

Table 3 Cost Impacts of Roadway Capacity Expansion

Costs Reduced	Costs Increased		
	<i>Diverted Trips</i>	<i>Longer Trips</i>	<i>Induced Trips</i>
Travel Time Vehicle Operating Costs	Downstream congestion	Downstream Congestion Road facilities Traffic services Crashes Pollution emissions Noise Resource externalities Land use impacts Barrier effect	Downstream Congestion Road facilities Parking facilities Traffic services Crashes Pollution emissions Noise Resource externalities Land use impacts Barrier effect Transit efficiency Equity Vehicle ownership costs

Increased roadway capacity tends to reduce two costs, but increases others.

The incremental external costs of road capacity expansion tend to increase over time as the total amount of generated traffic grows and an increasing portion consists of induced motor vehicle travel and trips.

Table 4 proposes default estimates of the incremental external costs of different types of generated traffic. These values can be adjusted to reflect specific conditions and analysis needs.

Table 4 Estimated Incremental External Costs of Generated Traffic


Type	Description	Cost Per Mile
Time and route shift	Trips shifted from off-peak to peak, or from another route.	5 cents
Transit-to-Auto mode shift, and longer trips	Trips shifted from transit to driving alone, and increased automobile trip lengths.	15 cents
Induced vehicle trip	Additional motor vehicle trip, including travel shifted from walking, cycling and ridesharing.	30 cents.

This table indicates the estimated incremental costs of different types of generated traffic.

Calculating Consumer Benefits

Generated traffic represents increased mobility, which provides consumer benefits. However, these benefits tend to be modest because generated traffic consists of marginal value trips, the trips that people are most willing to forego (Small, 1998). To calculate these benefits economists use the *Rule of Half*, which states that the benefits of additional travel are worth half the per-trip saving to existing travelers, as illustrated in Figure 3 by the fact that B is a triangle rather than a rectangle (AASHTO, 1977; Litman, 2001).

Figure 3 Vehicle Travel Demand Curve Illustrating the Rule-of-Half

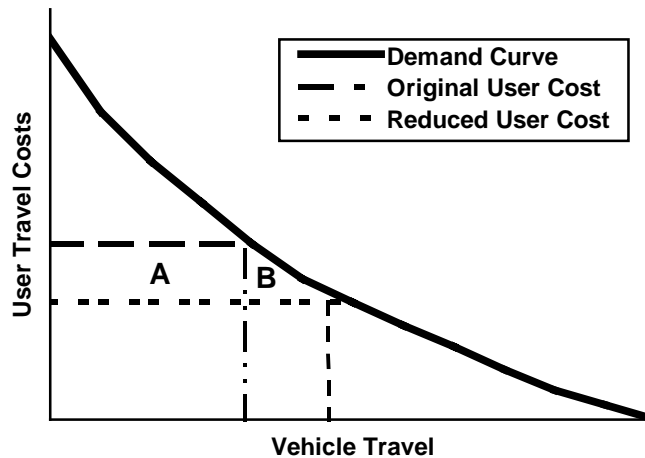

Reduced user costs (downward shift on Y axis) increases vehicle travel (rightward shift on X axis). Rectangle A shows savings to existing trips. Triangle B shows generated travel benefits.

Some newer project evaluation models, such as the FHWA's SMITE and STEAM sketch plan programs, incorporate generated traffic effects including the Rule of Half and some externalities (FHWA, 1997; FHWA, 1998; DeCorla-Souza and Cohen, 1998).


The benefits of increased mobility are often capitalized into land values. For example, a highway improvement can increase urban periphery real estate prices, or a highway offramp can increase nearby commercial land values (Moore and Thorsnes, 1994). Because this increase in land values is an economic transfer (land sellers gain at the expense of land buyers), it is inappropriate to add increased real estate values and transport benefits, such as travel time savings (which represent true resource savings). This would double count benefits.

Example

A four-lane, 10-kilometer highway connects a city with nearby suburbs. The highway is congested 1,000 hours per year in each direction. Regional travel demand is predicated to grow at 2% per year. A proposal is made to expand the highway to six lanes, costing \$25 million in capital expenses and adding \$1 million in annual highway operating expenses.

Figure 4 illustrates predicted traffic volumes. Without the project peak-hour traffic is limited to 4,000 vehicles in each direction, the maximum capacity of the two-lane highway. If generated traffic is ignored the model predicts that traffic volumes will grow at a steady 2% per year if the project is implemented. If generated traffic is considered the model predicts faster growth, including the basic 2% growth plus additional growth due to generated traffic, until volumes levels off at 6,000 vehicles per hour, the maximum capacity of three lanes.

Figure 4 Projected Traffic

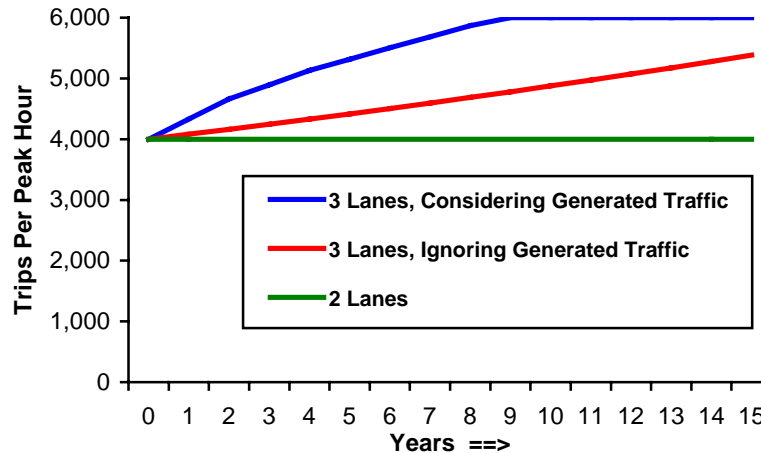


If generated traffic is ignored the model predicts that traffic volumes will grow at a steady 2% per year if the project is implemented. If generated traffic is considered the model predicts a higher initial growth rate, which eventually declines when the road once again reaches capacity and becomes congested. (Based on the “Moderate Latent Demand” curve from Figure 2)

The model divides generated traffic into diverted trips (changes in trip time, route and mode) and induced travel (increased trips and trip length), using the assumption that the first year’s generated traffic represents diverted trips and later generated traffic represents induced travel. This simplification appears reasonable since diverted trips tend to occur in the short-term, while induced travel is associated with longer-term changes in consumer behavior and land use patterns.

Roadway volume to capacity ratios are used to calculate peak-period traffic speeds, which are then used to calculate travel time and vehicle operating cost savings. Congestion reduction benefits are predicted to be significantly greater if generated traffic is ignored, as illustrated in Figure 5.

Figure 5 Projected Average Traffic Speeds

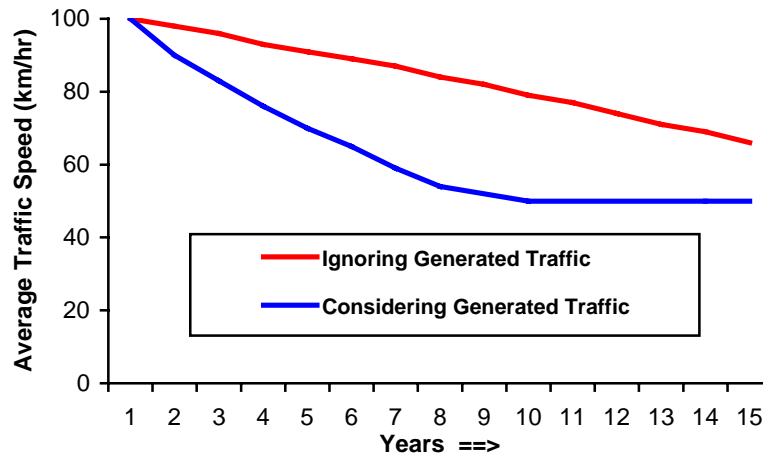

When generated traffic is ignored, average traffic speeds is predicted to be much higher than if generated traffic is considered.

Incremental external costs are assumed to average 10¢ per vehicle-kilometer for diverted trips (shifts in time, route and mode) and 30¢ per vehicle-kilometer for induced travel (longer and increased trips). User benefits of generated traffic are calculated using the Rule-of-Half.

Three cases were considered for sensitivity analysis. “Most Favorable” uses assumptions most favorable to the project, “Medium” uses values considered most likely, and “Least Favorable” uses assumptions least favorable to the project. Table 5 lists variables used in the analysis and summarizes the results.

Table 5 Analysis of Three Cases


Data Input	Most Favorable	Medium	Least Favorable
Generated Traffic Growth Rate (from Figure 2)	L	M	H
Discount Rate	6%	6%	6%
Maximum Peak Vehicles Per Lane	2,200	2,000	1,800
Before Average Traffic Speed (km/hr)	40	50	60
After Average Traffic Speed (km/hr)	110	100	90
Value of Peak-Period Travel Time (per veh-hr)	\$12.00	\$8.00	\$6.00
Vehicle Operating Costs (per km)	\$0.15	\$0.12	\$0.10
Annual Lane Hours at Capacity Each Direction	1,200	1,000	800
Diverted Trip External Costs (per km)	\$0.00	\$0.10	\$0.15
Induced Travel External Costs (per km)	\$0.20	\$0.30	\$0.50
Net Present Value (millions)			
NPV Without Consideration of Generated Traffic	\$204.8	\$45.2	-\$9.8
NPV With Consideration of Generated Traffic	\$124.5	-\$32.1	-\$95.7
<i>Difference</i>	-\$80.3	-\$77.3	-\$85.8
Benefit/Cost Ratio			
Without Generated Traffic	6.90	2.30	0.72
With Generated Traffic	3.37	0.59	0.11

This table summarizes the assumptions used in this analysis.

The most favorable assumptions result in a positive B/C even when generated traffic is considered. The medium assumptions result in a positive B/C if generated traffic is ignored but a negative NPV if generated traffic is considered. The least favorable assumptions result in a negative B/C even when generated traffic is ignored. In each case, considering generated traffic has significant impacts on the results.

Figure 6 illustrates project benefits and costs based on “Medium” assumptions, ignoring generated traffic. This results in a positive NPV of \$45.2 million, implying that the project is economically worthwhile.


Figure 6 Estimated Costs and Benefits, Ignoring Generated Traffic

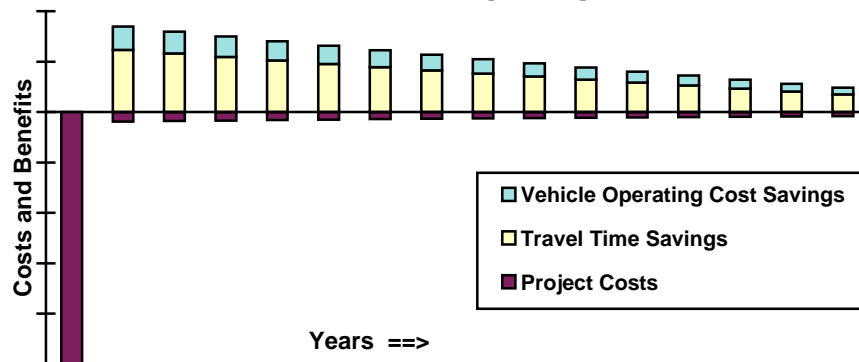

This figure illustrates annual benefits and costs when generated traffic is ignored, using “Medium” assumptions. Benefits are bars above the baseline, costs are bars below the baseline. Project expenses are the only cost category.

Figure 7 illustrates project benefits and costs when generated traffic is considered. Congestion reduction benefits decline, and additional external costs and consumer benefits are included. The NPV is -\$32.1 million, indicating that the project is not worthwhile.

Figure 7 Estimated Costs and Benefits, Considering Generated Traffic

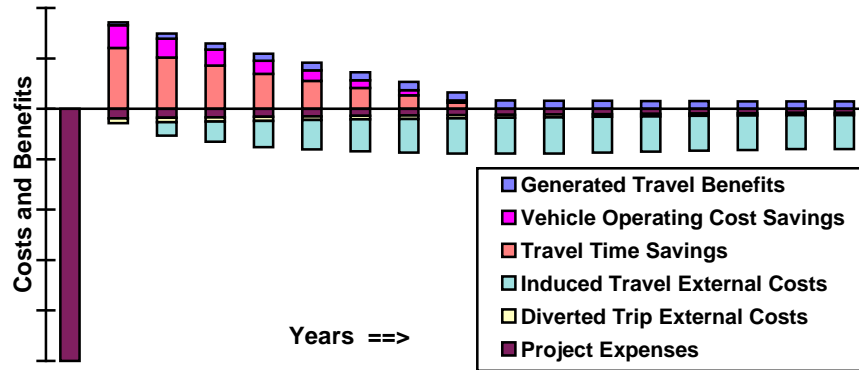

This figure illustrates benefits and costs when generated traffic is considered, using medium assumptions. Benefits are bars above the baseline, costs are bars below the baseline. It includes consumer benefits and external costs associated with generated traffic. Travel time and vehicle operating cost savings end after about 10 years, when traffic volumes per lane return to pre-project levels, resulting in no congestion reduction benefits after that time.

This analysis indicates how generated traffic can have significant impacts on project assessment. Ignoring generated traffic exaggerates the benefits of highway capacity expansion by overestimating congestion reduction benefits and ignoring incremental external costs from generated traffic. This tends to undervalue alternatives such as road pricing, TDM programs, other modes, and “do nothing” options.

Counter Arguments

“Increasing highway capacity is equivalent to giving bigger shoes to growing children” Robert Dunphy of the Urban Land Institute

“Widening roads to ease congestion is like trying to cure obesity by loosening your belt” Roy Kienitz, executive director of the Surface Transportation Policy Project

Highway advocates suggest that generated traffic has minor implications for transport decisions. They argue that increased highway capacity contributes little to overall growth in vehicle travel compared with other factors such as increased population, employment and income (Heanue, 1998). Others argue that although new highways generate traffic, they still provide net economic benefits (ULI, 1989). A study financed by the Illinois State Toll Highway Authority concludes that new highways are a minor factor in urban decentralization (Sen, 1998). The Road Information Program argues that increasing roadway capacity does reduce traffic congestion (TRIP, 1999).

These arguments ignore critical issues (and are often based on technically inaccurate analysis or outdated data). Overall travel trends indicate little about the cost effectiveness of particular projects and policies. For example, increasing national VMT does not mean that roadway capacity must increase by a similar amount. Strategies that encourage more efficient use of existing road capacity may provide greater social benefits, particularly when all costs are considered (Goodwin, 1997).

Debates over generated traffic and its implications often reflect ideological perspectives concerning whether automobile travel (and therefore road capacity expansion) is “good” or “bad”. To an economist, such arguments are silly. Obviously, some automobile travel is good (high consumer value, no reasonable alternative, resulting in large net social benefits), and some is bad (low consumer value, good alternatives, high externalities, negative net social benefits). The solution usually recommended by economists is to accommodate and improve the high value travel while discouraging low value travel and external costs using economic incentives and pricing to test consumers’ willingness-to-pay of each car trip.

If consumers only demand roadway improvements when they are shielded from the true costs, such projects are likely to be economically inefficient. Only if users are willing to pay the full incremental costs their vehicle use imposes can society be sure that increased road capacity and the addition vehicle travel that results provides net benefits. Travel demand predictions based on underpriced roads overestimate the economically optimal level of roadway investments and capacity expansion. Increasing capacity in such cases is more equivalent to loosening a belt than giving a growing child larger shoes (see quotes above), since the additional vehicle travel is a luxury and economically inefficient.

Some highway advocates suggest there are equity reasons for increasing roadway capacity without user charges, to allow lower-income households access to more desirable locations, but most benefits from increased roadway capacity are captured by

middle- and upper-income households (Deakin, et al, 1996). Improving travel choices for non-drivers tends to have greater equity benefits than subsidizing additional highway capacity since physically and economically disadvantaged people often rely on alternative modes.

Although highway projects are often justified for the sake of economic development, highway capacity expansion now provides little net economic benefit (Boarnet, 1997). An expert review concluded, “The available evidence does not support arguments that new transport investment in general has a major impact on economic growth in a country with an already well-developed infrastructure” (SACTRA, 1997).

Alternative Strategies for Improving Transport

Since roadway capacity expansion provides smaller net benefits than is usually recognized, due to the effects of generated traffic, other solutions to transportation problems may become relatively more attractive. A “No Build” option may become more attractive since peak-period traffic volumes will simply level off without additional capacity. This can explain, for example, why urban commute travel times are virtually unchanged despite increases in traffic congestion (Gordon and Richardson, 1994).

Consideration of generated traffic gives more value to transportation systems management and transportation demand management strategies that result in more efficient use of existing roadway capacity. These strategies cannot individually solve all transportation problems, but a package of them can, often with less costs and greater overall benefit than highway capacity expansion. Below are examples (VTPI, 2001):

- Congestion pricing can provide travelers with an incentive to reduce their peak period trips and use travel alternatives, such as ridesharing and non-motorized transport.
- Commute trip reduction programs can provide a framework for encouraging commuters to drive less and rely more on travel alternatives.
- Land use management can increase access by bringing closer common destinations.
- Pedestrian and cycle improvements can increase mobility and access, and support other modes such as public transit (since transit users also depend on walking and cycling).
- Public transit service that offers door-to-door travel times and user costs that are competitive with driving can attract travelers from a parallel highway, limiting the magnitude of traffic congestion on that corridor.

Legal Issues

Environmental groups successfully sued the Illinois transportation agencies for failing to consider land use impacts and generated traffic in the Environmental Impact Statement (EIS) for I-355, a proposed highway extension outside the city of Chicago (Sierra Club, 1997). The federal court concluded that the EIS was based on the “implausible” assumption that population in the rural areas would grow by the same amount with and without the tollroad, even though project was promoted as a way to stimulate growth. The court concluded that this circular reasoning afflicted the document’s core findings. The judge required the agencies to prepare studies identifying the amount of development the tollroad would cause, and compare this with alternatives. The Court’s order states:

Plaintiffs’ argument is persuasive. Highways create demand for travel and expansion by their very existence...Environmental laws are not arbitrary hoops through which government agencies must jump. The environmental regulations at issue in this case are designed to ensure that the public and government agencies are well informed about the environmental consequences of proposed actions. The environmental impact statements in this case fail in several significant respects to serve this purpose. (ELCP)

Conclusions

Urban traffic congestion tends to maintain an equilibrium. Congestion reaches a point at which it discourages additional peak-period trips. If road capacity increases, peak-period trips also increase. In the short term this consists primarily of travel diverted from other times, modes, routes and destinations. Over the long run an increasing portion consists of induced vehicle travel, resulting in a total increase in regional VMT. This has several implications for transport planning:

- Ignoring generated traffic overestimates the magnitude of future traffic congestion problems, overestimates the congestion reduction benefits of increasing roadway capacity, and underestimates the benefits of alternative solutions to transportation problems.
- Induced travel increases many external costs. Over the long term it helps create more automobile dependent transportation systems and land use patterns.
- The mobility benefits of generated traffic are relatively small since they consist of marginal value trips. Much of the benefits are often capitalized into land values.

Ignoring generated traffic results in self-fulfilling “predict and provide” planning. Here is what happens: Planners extrapolate traffic growth rates to predict that congestion will reach “gridlock” unless more capacity is provided. Adding capacity generates traffic, which leads to renewed congestion with higher traffic volumes, and more automobile oriented transport systems and land use patterns. This cycle continues until the costs of increasing road capacity become unacceptable.

Generated traffic does not mean that road capacity projects provide no benefits and should never be implemented. However, current planning practices that ignore some or all generated traffic impacts result in inaccurate forecasts of impacts and benefits. Road projects considered cost effective by conventional models may actually provide little long-term benefit to motorists and make society worse off overall, due to generated traffic. Other strategies may provide greater net benefits when all impacts are considered. Another implication is that highway capacity expansion projects should incorporate strategies to avoid increasing external costs, such as more stringent vehicle emission regulations to avoid increasing pollution and land use regulations to limit sprawl.

Framing the Congestion Question

If you ask people, “*Do you think that traffic congestion is a serious problem?*” most would probably answer yes. If you ask, “*Would you rather solve congestion problems by improving roads or by using alternatives such as congestion tolls and other TDM strategies?*” a smaller majority would probably choose the road improvement option. These are essentially how transportation choices are generally framed.

But if you present the choices more realistically by asking, “*Would you rather spend a lot of money increasing road capacity to achieve moderate and temporary reductions in traffic congestion, and bear higher future costs from increased motor vehicle traffic?*” the preference for road building might disappear.

Resources

John Abraham, *Review of the MEPLAN Modelling Framework from a Perspective of Urban Economics*, Civil Engineering Research Report CE98-2, U. of Calgary, (www.acs.ucalgary.ca/~jabraham/MEPLAN_and_Urban_Economics.PDF), 1998.

Richard Arnott and Kenneth Small, "The Economics of Traffic Congestion," *American Scientist*, Vol. 82, Sept./ Oct. 1994, pp. 446-455.

Marlon Boarnet, "New Highways & Economic Productivity: Interpreting Recent Evidence," *Journal of Planning Literature*, Vol. 11, No. 4, May 1997, pp. 476-486.

Marlon Boarnet, *Direct and Indirect Economic Effects of Transportation Infrastructure*, UCTC (Berkeley; www.uctc.net), 1997.

Marlon Boarnet and Saksith Tan Chalermpong, *New Highways, Induced Travel and Urban Growth Patterns: A "Before and After" Test*, University of California Transportation Center (www.uctc.net), Paper 559, September 2002.

Edward Beimborn, Rob Kennedy and William Schaefer, *Inside the Blackbox: Making Transportation Models Work for Livable Communities*, EDF (www.edf.org; www.uwm.edu/dept/cuts), 1996.

Robert Burchell, et al., *Costs of Sprawl – Revisited*, TCRP Report 39, Transportation Research Board (www.trb.org), 1998.

Sally Cairns, C. Hass-Klau and Phil Goodwin, *Traffic Impacts of Highway Capacity Reductions: Assessment of the Evidence*, London Transport Planning (London; www.ucl.ac.uk/transport-studies/tsu/tpab9828.htm), 1998. Also see Sally Cairns, Stephen Atkins and Phil Goodwin, "Disappearing Traffic? The Story So Far," *Proceedings of the Institution of Civil Engineers; Municipal Engineer*, Vo. 151, Issue 1 (www.municipalengineer.com) March 2002, pp. 13-22; available at www.ucl.ac.uk/transport-studies/tsu/disapp.pdf.

Robert Cervero, "Are Induced Travel Studies Inducing Bad Investments?," *ACCESS*, Number 22, University of California Transportation Center (www.uctc.net), Spring 2003, 22-27.

Robert Cervero and Mark Hansen, *Road Supply-Demand Relationships: Sorting Out Casual Linkages*, Institute of Transportation Studies, University of California (www.uctc.net) 2000.

Harry Cohen, "Review of Empirical Studies of Induced Traffic," *Expanding Metropolitan Highways: Implications for Air Quality and Energy Use*, Transportation Research Board, Special Report #345, National Academy Press (Washington DC), 1995, Appendix B, pp. 295-309.

Comsis Corporation, *Incorporating Feedback in Travel Forecasting: Methods, Pitfalls and Common Concerns*, USDOT (Washington DC; available on BTS-CD-11), March 1996.

J. M. Dargay and P. B. Goodwin, "Evaluation of Consumer Surplus with Dynamic Demand Changes." *Journal of Transport Economics and Policy*, Vol. XXIX, No. 2, 1995, pp. 179-93.

Elizabeth Deakin, et al., *Transportation Pricing Strategies for California: An Assessment of Congestion, Emissions, Energy and Equity Impacts*, California Air Resources Board (Sacramento), 1996.

Patrick DeCorla-Souza and Harry Cohen. *Accounting for Induced Travel in Evaluation of Urban Highway Expansion*, FHWA (www.fhwa.dot.gov/steam/doc.htm), 1998.

Patrick DeCorla Souza and Harry Cohen, "Estimating Induced Travel For Evaluation of Metropolitan Highway Expansion," *Transportation*, Vol. 26, 1999, pp. 249-261.

Patrick DeCorla-Souza, "Estimating Highway Mobility Benefits," *ITE Journal*. February 2000, pp. 38-43. Also, Patrick DeCorla-Souza, "Evaluating the Trade-Offs Between Mobility and Air Quality," *ITE Journal*, forthcoming.

Mark Delucchi, "Total Cost of Motor-Vehicle Use," *Access* (<http://violet.berkeley.edu/~uctc>), No. 8, Spring 1996, pp. 7-13.

Anthony Downs, *Stuck in Traffic*, Brookings Institute (Washington DC; www.brookings.edu), 1992.

ELPC, Environmental Law and Policy Center (www.elpc.org/trans/index.htm).

FHWA, *Spreadsheet Model for Induced Travel Estimation (SMITE)* (www.fhwa.dot.gov/steam/smite.htm), 1997. A transport planning model which incorporates generated traffic.

FHWA, *Surface Transportation Efficiency Analysis Model (STEAM)* available at www.fhwa.dot.gov/steam, 1998.

FHWA, *Social Costs of Alternative Land Development Scenarios* (www.fhwa.dot.gov/scalds/scalds.html), 1999.

Phil Goodwin, "Empirical Evidence on Induced Traffic," *Transportation*, Vo. 23, No. 1, 1996, pp. 35-54.

Phil Goodwin, *Solving Congestion*, Inaugural lecture for the Professorship of Transport Policy, University College London (www.ucl.ac.uk/transport-studies/tsu/pbginau.htm), 1997.

Phil B. Goodwin. "The End of Equilibrium," in *Theoretical Foundations of Travel Choice Modelling*. edited by T. Garling et al., Elsevier, ISBN 0080430627, 1998.

Goodwin, Phil; Robert B. Noland, "Building New Roads Really Does Create Extra Traffic: A Response to Prakash et al.," *Applied Economics* (www.tandf.co.uk/journals), Forthcoming, 2003.

Peter Gordon and Harry W. Richardson, "Congestion Trends in Metropolitan Areas," *Curbing Gridlock*, Special Report 242, Transportation Research Board (www.nas.edu/trb), 1994.

Mark Hammer, "Roadblocks Ahead," *New Scientist*, 24 January 1998, (www.newscientist.com/cgi-bin/pageserver.cgi?ns/980124/ntraffic.h).

- Mark Hansen, et al. *Air Quality Impacts of Urban Highway Capacity Expansion: Traffic Generation and Land Use Changes*, Institute of Transport Studies, University of California (Berkeley; www.uctc.net), UCB-ITS-RR-93-5, 1993.
- Mark Hansen, “Do New Highways Generate Traffic?” *Access No. 7* (www.uctc.net), Fall 1995, pp.16-22.
- Mark Hansen and Yuanlin Huang, “Road Supply and Traffic in California Urban Areas,” *Transportation Research A*, Vol. 31, No. 3, 1997, pp. 205-218.
- Greig Harvey & Elizabeth Deakin, *A Manual of Regional Transportation Modeling Practice for Air Quality*, National Association of Regional Councils (Washington DC; www.narc.org), 1993.
- Kevin Heanue, *Highway Capacity Expansion and Induced Travel; Evidence and Implications*, Circular #481, Transportation Research Board (Washington DC; www.nas.edu/trb), February 1998.
- Peter Hills, “What is Induced Traffic?” *Transportation*, Vol. 23, No. 1, Feb. 1996, pp. 5-16.
- Peter Jacobsen, “Liquid vs. Gas Models for Traffic,” *Los Angeles Times*, Letters to Editor, 14 May 1997.
- Pro. Robert Johnston and Raju Ceerla, “The Effects of New High-Occupancy Vehicle Lanes on Travel and Emissions,” *Transportation Research*, Vol. 30A, No. 1, 1996, pp. 35-50.
- Douglass Lee, Lisa Klein and Gregorio Camus, *Induced Traffic and Induced Demand in Benefit-Cost Analysis*, USDOT Volpe National Transport. Systems Center (Cambridge; www.volpe.dot.gov), 1998.
- Douglass Lee, Lisa Klein and Gregorio Camus, “Induced Traffic and Induced Demand,” *Transportation Research Record 1659*, 1999, pp. 68-75.
- David Levinson and Ajay Kumar, “Activity, Travel, and the Allocation of Time,” *APA Journal*, Vol. 61, No. 4, Autumn 1995, pp. 458-470.
- David Levinson and Ajay Kumar, *Density and the Journey to Work, Growth and Changes*, Vol. 28, No. 2 1997, pp. 147-72, www.ce.umn.edu/~levinson/papers-pdf/doc-density.pdf.
- Louis Berger & Assoc., *Guidance for Estimating the Indirect Effects of Proposed Transportation Projects*, NCHRP Report 403, Transportation Research Board (www.trb.org), 1998.
- Todd Litman, *Transportation Cost Analysis: Techniques, Estimates and Implications*, VTPI (www.vtpi.org), 2002.
- Todd Litman, *What’s It Worth? Life Cycle and Benefit/Cost Analysis for Evaluating Economic Value*, Presented at Internet Symposium on Benefit-Cost Analysis, Transportation Association of Canada (www.tac-atc.ca), available at VTPI (www.vtpi.org), 2001.
- William Loudon, Janaki Parameswaran & Brian Gardner. “Incorporating Feedback in Travel Forecasting,” *Transportation Research Record 1607*, 1997, TRB (www.trb.org) pp. 185-195.

Peter Mackie, "Induced Traffic and Economic Appraisal," *Transportation*, Vol. 23, 1996, p. 113.

Norman Marshall, *Evidence of Induced Demand in the Texas Transportation Institute's Urban Roadway Congestion Study Data Set*, TRB Annual Meeting (www.nationalacademies.org/trb), 2000.

Martin Mogridge, "The Self-Defeating Nature of Urban Road Capacity Policy; A Review of Theories, Disputes and Available Evidence," *Transport Policy*, Vol. 4, No. 1, Jan. 1997, pp. 5-23.

Patricia Mokhtarian, et al., "Revisiting the Notion of Induced Traffic Through A Matched-Pairs Study," *Transportation*, Vol. 29, 2002, pp. 193-202.

Terry Moore and Paul Thorsnes, *The Transportation/Land Use Connection*, American Planning Association (Chicago), #448/449, 1994.

James Murphy and Mark Delucchi, "A Review of the Literature on the Social Cost of Motor Vehicle Use in the United States," *Journal of Transport & Statistics*, Vol. 1, No. 1, 1998, pp. 15-42.

Peter Newman and Jeff Kenworthy, *Sustainability and Cities; Overcoming Automobile Dependency*, Island Press (www.islandpress.org), 1998.

NHI, *Estimating the Impacts of Urban Transportation Alternatives*, Participant's Notebook, National Highway Institute, NHI Course #15257, Federal Highway Administration (Washington DC), Dec. 1995.

Bob Noland, *Induced Travel: A Review Of Recent Literature With A Discussion Of Policy Issues*, USEPA (www.epa.gov/tp/rap.htm), 2000. Also see Robert B. Noland and Lewison L. Lem, *Induced Travel: A Review of Recent Literature and the Implications for Transportation and Environmental Policy*, (www.cts.cv.ic.ac.uk/staff/wp2-noland.pdf), 2000.

Robert Noland, "Relationships Between Highway Capacity and Induced Vehicle Travel," *Transportation Research A*, Vol. 35, No. 1, January 2001, pp. 47-72; also available at www.epa.gov/tp/trb-rn.pdf.

Robert B. Noland and Lewison L. Lem, "A Review of the Evidence for Induced Travel and Changes in Transportation and Environmental Policy in the US and the UK," *Transportation Research D*, Vol. 7, No. 1 (www.elsevier.com/locate/trd), Jan. 2002, pp. 1-26.

OECD 105 Roundtable, *Infrastructure-Induced Mobility*, OECD (www.oecd.org), 1996.

Caroline Rodier, John E. Abraham, Robert A. Johnston and John Douglass Hunt, *Anatomy of Induced Travel; Using an Integrated Land Use and Transportation Model in the Sacramento Region*, Transportation Research Board Annual Meeting (www.trb.org), 2001.

SACTRA, *Trunk Roads and the Generation of Traffic*, Standing Advisory Committee on Trunk Road Assessment, UKDoT, HMSO (London; www.roads.detr.gov.uk/roadnetwork), 1994.

SACTRA, Transport Investment, *Transport Intensity and Economic Growth: Interim Report*, Standing Committee on Trunk Road Assessment, Dept. of Environment, Transport and Regions (London; www.roads.detr.gov.uk/roadnetwork/heta/sactra98.htm), 1997.

D. Shefer & P. Rietvald, "Congestion and Safety on Highways: Towards an Analytical Model," *Urban Studies*, Vol. 34, No. 4, 1997, pp. 679-692.

Sierra Club, *Ill. Chapter v U.S. Dept. of Transp.* (962 F supp. 1037, ND Ill 1997).

Kenneth Small, *Urban Transportation Economics*, Harwood (Chur), 1992, pp. 113-117.

Kenneth Small, "Project Evaluation," in *Essays in Transportation Economics and Policy*, Brookings Institute (www.brookings.edu), also at <http://socrates.berkeley.edu/~uctc/text/papersuctc.html>), 1998.

STPP, *An Analysis of the Relationship Between Highway Expansion and Congestion in Metropolitan Areas*, Surface Transportation Policy Project (Washington DC; www.transact.org), 1998.

STPP, *Do New Roads Cause Congestion?*, Surface Transportation Policy Project (www.transact.org/congestion/analysis.htm) 1998.

Transportation, Vol. 23, No. 1, Feb. 1996. Special issue devoted to induced travel.

TRB, *Expanding Metropolitan Highways: Implications for Air Quality and Energy Use*, Committee for Study of Impacts of Highway Capacity Improvements on Air Quality and Energy Consumption, Transportation Research Board, Special Report #345, National Academy Press (Washington DC), 1995.

TRIP, *The Best Solutions to Traffic Congestion: Dispelling the Myths about the Impact of Expanding Roads*, The Road Information Program (www.tripnet.org), 1999.

Ashish Sen, et al, *Highways and Urban Decentralization*, Urban Transportation Center, University of Illinois (Chicago; <http://www.uic.edu/cuppa/utc>), 1998. For a response see, *Critique of the University of Illinois Urban Transportation Center Study "Highways and Urban Decentralization,"* Center For Neighborhood Technology (<http://www.cnt.org/tsp/uic-critique.html>), 1999.

ULI, *Myths and Facts about Transportation and Growth*, Urban Land Institute (www.uli.org), 1989.

USEPA, *Evaluation of Modeling Tools for Assessing Land Use Policies and Strategies*, USEPA, (www.epa.gov/oms/transp/trancont/lum-rpt.pdf).

USEPA, *Resources for Cumulative Effects Assessment*, USEPA Region 3, (www.epa.gov/reg3esd1/cea/01_home.htm). Summary of current research.

VTPI, *Online TDM Encyclopedia*, VTPI (www.vtppi.org), 2000.

Huw C. W. L. Williams and Yaeko Yamashita, "Travel Demand Forecasts and the Evaluation of Highway Schemes Under Congested Conditions," *Journal of Transport Economics and Policy*, Vol. 26, No. 3, September 1992, pp. 261-282.